


LL3 Series LED Linear Light


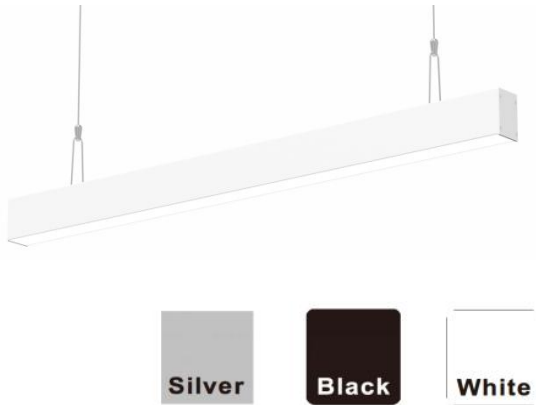


FEATURE:

- Luminous efficacy: 115lm/w;
- Selectable Watts:10w to 100w
- Selectable CCT:3000K-3500K-4000K
- 2FT,4FT & 8FT Size
- Isolated driver: 0-10V dimming; Flicker free
- PF> 0.90; Driver efficiency 87%; THD<20%
- Chain,Wall,Surface Mount,Recessed Optional
- Input Voltage:120-277V,120-347V
- Single CCT:3000K 3500K 4000K
- ETL CETL,DLC FCC certification
- 5 years warranty

APPLICATIONS

- Commercial
- General office
- Banking
- Retail
- School
- Warehouse

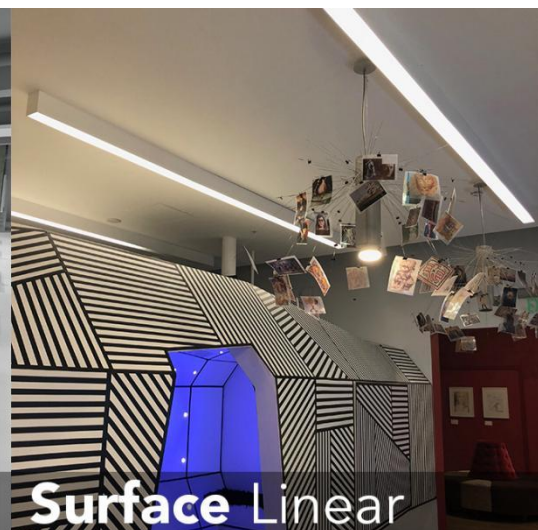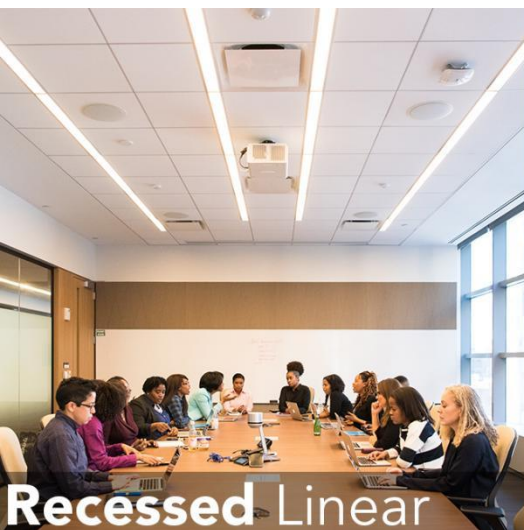


Product Range

Series	Watts	Size	Voltage	CCT	Linkable	Emergency	UP & Down	Smart
LL3	AAW	BBB	CCC	DDD	E	F	G	H
LL3	Selectable 10W/15W/20W/25W	2= 4ft	277=120-277V	30K = 3,000 K	L=Linkable	E=Emergency	UD= UP&Down	SM=Smart Tuya,zigbee
	Selectable 35W/40W/45W/50W Only 40W	4= 4ft	347=120-347V	35K = 3,500 K	Black=Without Linkable	Black=without Emergency	D= Down	Black=without Emergency
	Selectable 70W/80W/90W/100W Only 80W	8= 8ft	240=220-240V	40K = 4,000 K				
				3CCT=3000K- 4000K-5000K				

Model	Size	Watts	Voltage	Dimming	CCT	Lumens	Dimensions (LxWxH)
RDS-LL3-20W-2FT277-3CCT-EFG-H	2 ft	Selectable 10W/15W/20W/25W	120-277v 120-347v 220-240v	YES	Selectable 3000K-3500K-5000K	1150-2875 lm	24 * 2.36 * 3.54"
RDS-LL3-40W-4FT277-3CCT-EFG-H	4 ft	Selectable 35W/40W/45W/50W		YES	Selectable 3000K-3500K-5000K	4025-5750 lm	48 * 2.36 * 3.54"
RDS-LL3-40W-4FT277-3CCT-EGH	4 ft	40W		YES	3000K/3500K/4000K	4600 lm	48 * 2.36 * 3.54"
RDS-LL3-80W-8FT277-3CCT-EFG-H	8 ft	Selectable 70W/80W/90W/100W		YES	Selectable 3000K-3500K-5000K	8050-11500 lm	96 * 2.36 * 3.54"
RDS-LL3-80W-8FT277-3CCT-EGH	8 ft	80 W		YES	3000K/3500K/4000K	9200 lm	96 * 2.36 * 3.54"


Dimensions

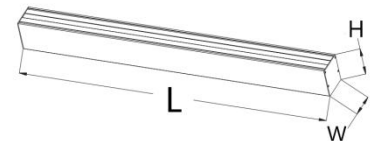

Part No.	L(inch)	W(inch)	H(inch)
RDS-LL3-20W-2FT277-3CCT-EFG-H	48"	2.36"	3.54"
RDS-LL3-40W-4FT277-3CCT-EFG-H	48"	2.36"	3.54"
RDS-LL3-40W-4FT277-3CCT-EGH	48"	2.36"	3.54"
RDS-LL3-80W-8FT277-3CCT-EFG-H	72"	2.36"	3.54"
RDS-LL3-80W-8FT277-3CCT-EGH	96"	2.36"	3.54"

Part No.	Power	Qty/Carton(pcs)	Carton Size	Net weight	Gross Weight
RDS-LL3-20W-2FT277-3CCT-EFG-H	Selectable 10W/15W/20W/25W	6	125*38.5*26CM	19.9Kg	23.4Kg
RDS-LL3-40W-4FT277-3CCT-EFG-H	Selectable 35W/40W/45W/50W	6	125*38.5*26CM	20Kg	23.5Kg
RDS-LL3-40W-4FT277-DDD-EFGH	40W	6	125*38.5*26CM	21.5Kg	24Kg
RDS-LL3-80W-8FT277-3CCT-EFG-H	Selectable 70W/80W/90W/100W	4	185*38.5*26CM	26kg	28kg
RDS-LL3-80W-8FT277-DDD-EFG-H	80 W	4	245*38.5*26CM	30kg	32kg

1 Direct & Indirect Options

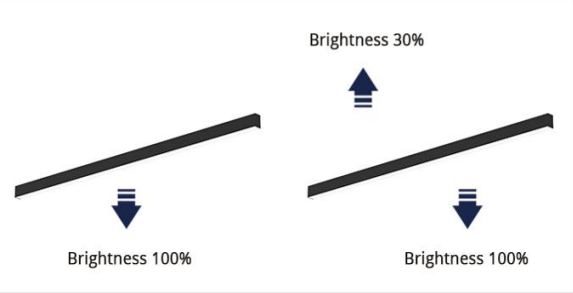


Brightness 30%

Brightness 100%


Brightness 100%

2 TuYa Smart Optional



- White mode**
Adjust brightness and temperature of white light
- Color mode**
Adjust color, brightness, saturation of colorful light
- Scene mode**
Selective modes, one tap to apply

3 Microwave Sensor Optional

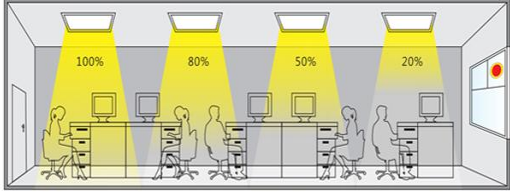

100%


80%

50%

20%

4 Emergency Driver

Unrivaled emergency solutions with UL listed.>90 emergency times




UL LISTED 648315

LFP, LED, 24, 5, IP20, 90min, LVL, 100-277, 100-347


5 Installation type

Quick install- save your cost



CABLE SURFACE WALL RECESSED MOUNT

6 Easy to install



L connection T connection X connection