

**RDS-WS SERIES LED LOW BAY FIXTURE**

**DESCRIPTION**

The WS Series is a featured LED Low bay fixture. Is suitable for general propose lighting in a wide variety of environments,such as commercial,industrial,retail or ware-house lighting applications.

**FEATURES**

- 4' & 8' models
- 0-10v dimming
- For Single or continuous row mounting
- 5 years warranty

**PERFORMANCE**

- Rated lifetime L70: 50,000 hours
- CCT:3500K, 4000K, 5000K
- CRI: 80+

**ELECTRICAL**

- Input voltage:120-277VAC,120-347VAC
- Power Factor:>0.90
- THD: <20%

<b>project name</b>	<b>type</b>
<b>catalog number</b>	
<b>comments</b>	<b>voltage</b>
<b>approved by</b>	<b>date</b>



**APPLICATIONS**


- Commercial
- Retail
- industrial
- Factory
- Workshop
- Warehouse



## Product Range

Series	Watts	Size	Voltage	CCT	Driver	Motion Sensor	Emergency	Linkable	Cord types
AA	AAW	BBB	CCC	DDD	E	F	G	H	I
WS	90=90W	4= 4ft	277=120-277V	3CCT=3,500K -5,000K	A=AGT	S=Sensor	E=Emergency	L=Linkable	SM=with Smart
	150=150W	8= 8ft	347=120-347V		WP=Weled	Black=Without Sensor	Black=without Emergency	Black=Without Linkable	Blank=without Smart
			240=277-480V						

Model	Size	Watts	Voltage	Dimming	CCT	Lumens	Dimensions (LxWxH)
RDS-W90-4FTXXX-3CCT	4 ft	Selectable 64W/76W/90W	120-277v 120-347v	YES	Selectable 3500K-5000K	8320-11700 lm	48 *4.7 * 3.5"
RDS-W150-8FTXXX-3CCT	8 ft	Selectable 110W/130W/150W	277-480v	YES	Selectable 3500K-5000K	14300-20000 lm	96 *4.7 * 3.5"

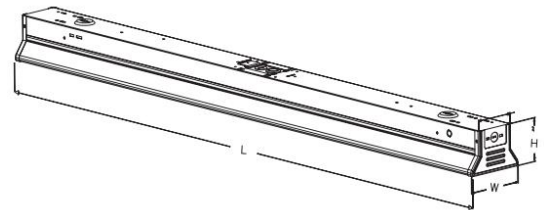

Part No.	L(inch)	W(inch)	H(inch)
RDS-W90-4FTXXX-3CCT	48"	4.7"	3.5"
RDS-W150-8FTXXX-3CCT	96"	4.7"	3.5"

## Product Packing

Part No.	Power	Product Size	Qty/Carton(pcs)	Carton Size	Net weight	Gross Weight
RDS-W90-4FTXXX-3CCT	Selectable 64W/76W/90W	48 *4.7 * 3.5"	4	127.5*28*21.8CM	12Kg	14Kg
RDS-W150-8FTXXX-3CCT	Selectable 110W/130W/150W	96 *4.7 * 3.5"	4	247.5*28*21.8CM	22Kg	24Kg